New Hampshire DOT
Department of Transportation

William Cass, P.E.
Commissioner

THE STATE OF NEW HAMPSHIRE
DEPARTMENT OF TRANSPORTATION

46F

David Rodrigue, P.E.
Assistant Commissioner

Andre Briere, Colonel, USAF (RET)
Deputy Commissioner

His Excellency, Governor Christopher T. Sununu
and the Honorable Council
State House
Concord, New Hampshire 03301

Bureau of Construction
December 2, 2024

REQUESTED ACTION

1. Authorize the Department of Transportation to enter into a contract with J.P. Sicard, Inc. (Vendor 227157) of Barton, VT, on the basis of a low bid of $12,923,145.50 for bridge rehabilitation at the Ashland-Bridgewater town line of the bridge carrying US 3 and NH 25 over the Pemigewasset River and NHRR (Br. No. 076/080 (Project: Ashland-Bridgewater #24904), from the date of Governor and Council approval through October 23, 2026, unless amended by the Department in accordance with the Standard Specifications. 100% Federal Funds.

Funds are available in the following account for Fiscal Year 2025, and are anticipated to be available in Fiscal Years 2026 and 2027, upon the availability and continued appropriation of funds in the future operating budgets, with the authority to adjust encumbrances between fiscal years within the price limitation through the Budget Office, if needed and justified:

Funding is available as follows:	FY 2025	FY 2026	FY 2027
04-96-96-963515-3054			
Consolidated Federal Aid			
400-500870 Highway Contract Payments	$5,479,413.71	$5,582,798.88	$1,860,932.91

2. Further authorize that a contingency in the amount of $1,292,314.55 be approved for payment of latent conditions, which may appear during the construction of the project. The contingency requested is 10% of the contract amount.

Funding is available as follows:	FY 2027
04-96-96-963515-3054	
Consolidated Federal Aid	
400-500870 Highway Contract Payments	$1,292,314.55

EXPLANATION

This project is part of the State's Ten-Year Transportation Improvement Plan. This project consists of rehabilitation work on the bridge at the Ashland-Bridgewater town line (Ashland Br. No. 076/080) carrying US 3 and NH 25 over Pemigewasset River and NHRR along with minor associated approach roadway work. The work limits begin approximately 190' west of the west abutment and continue easterly across the bridge approximately 1,274'. Rehabilitation work will consist of removing and replacing truss span concrete filled grid deck and brush curbs, trestle span bridge deck partial removal and reconstruction including brush curbs, and trestle span partial- and full-depth deck repair. Expansion joints will be replaced. Bridge rail will be replaced with T4 steel rail to meet current standards. Proposed rail anchorage on truss spans has been modified from crash test anchorage to allow for installation and attachment to the replacement concrete filled steel grid deck. Also, substructure repairs will be performed.

The purpose of the project is to extend the useful life of the bridge by performing bridge rehabilitation and preservation activities. The bridge rehabilitation/preservation work will extend the functional life of the bridges and delay regression to a lower condition state.

The existing bridge, built in 1937, is a nine (9) span structure consisting of seven (7) steel stringer/floor-beam trestle approach spans and two (2) steel deck truss main spans with a total length of approximately 800 feet. The last major rehabilitation work was in 1987. The bridge is not on the Red List and is #22 on the 2023 State Bridge Rehab and Replace

Priority List. This bridge is programmed with construction funding in FY 2024 utilizing T1-2 Rehab-Rcn funding. This project is between a Bridge Preservation and Bridge Rehabilitation effort.

The proposed contingency amount is 10% of the contract amount. The extent of this work has been estimated, but the full extent of the work won't be fully known until the pier repairs, as well as repairs to other parts of the bridge, are underway. These factors increase the risk of overruns.

Although the bid costs exceeded the Department's estimate by 82.20% the sole bid received is felt to be reasonable for the work involved. The higher than anticipated bid costs were identified as those items to access the bridge from the river and size/ volume of materials to replace the bridge deck. Items costs that were higher than our estimate were: Item 500.02 Access For Bridge Construction $1,385,000, Item 692 Mobilization $1,247,000, Item 502 Removal of Existing Bridge Structure $688,000, Item 520.7102 Concrete Bridge Deck $583,000, Item 555.3 Steel Grid Floor $576,000, Item 550.1901 Temporary Structure Support System $567,700, and Item 520.7002 Concrete Bridge Deck $329,500. Readvertising this project would result, in our opinion, in higher prices and prevent the completion of the work in a timely manner. The Department considers it to be in the best interest of the State to accept this bid to accomplish these needed repairs.

The Contractor has been prequalified by this Department. The Contract has been approved by the Attorney General as to form and execution, and the Department has certified that the necessary funds are available, and the bid reasonably conforms to the engineer's estimate in accordance with State procedure. Copies of the fully executed contract are on file at the Secretary of State's Office and the Department of Administrative Service's Office, and after Governor and Council approval will be on file at the Department of Transportation.

This project funding is: 80% Federal funds (Brdg-T1/2-R&R), with anticipated utilization of Turnpike Toll Credits for the State's 20% match, effectively using 100% Federal Funds.

A copy of the Tabulation of Bids received for this project is attached along with the Contract Supplemental Sheet and a map indicating the location of the project.

Your approval of this resolution is respectfully requested.

Sincerely,

William J. Cass, P.E.
Commissioner

WJC/pcj

Department Estimate:	$ 7,091,695.00
Contract Amount:	$12,923,145.50
Over Estimate:	$ 5,830,450.50

Attachments

New Hampshire DOT
Department of Transportation

ABC Bid Data

ASHLAND - BRIDGEWATER
24904
X-A003(003)

PROJECT:	ASHLAND - BRIDGEWATER	**Awarded To:**	SICARD INC, J P 234 GLOVER ROAD BARTON, VT 05822		
STATE PROJECT NUMBER:	24904				
FED. PROJECT NUMBER:	X-A003(003)				
DATE BIDS OPEN:	October 10, 2024, 2:00				
SCOPE OF WORK:	Address Bridge carrying US 3 & NH25 over NHRR and Pemigewasset River (Br No 076/080)	**Amount:**	$12,923,145.50	**Certified by:**	WILLIAM.J.OLDENBURG Director of Project Development
COMPLETION DATE:	October 23, 2026	**Award Date:**			
LOCATION:	Grafton, District 3				

Summary of Bidders

Contractor	Bid Amount	Rank
SICARD INC, J P 234 GLOVER ROAD, BARTON VT 05822	$12,923,145.50	A

New Hampshire DOT
Department of Transportation

ABC Bid Data

ASHLAND - BRIDGEWATER
24904
X-A003(003)

Item No.	Description	Unit	Quantity	PSAE Unit Price	PSAE Total	BICARD INC, J P 234 DLOVER ROAD BARTON, VT 05822 Unit Price	BICARD INC, J P 234 DLOVER ROAD BARTON, VT 05822 Total	Unit Price	Total
Items									
201.881	INVASIVE SPECIES CONTROL TYPE I	SY	50.00	$10.00	$500.00	$53.00	$2,650.00		
202.6	CURB REMOVAL FOR SALVAGE	LF	130.00	$12.00	$1,560.00	$15.00	$1,950.00		
202.7	REMOVAL OF GUARDRAIL	LF	170.00	$25.00	$4,250.00	$17.00	$2,890.00		
203.653	PORTABLE TRAFFIC SIGNAL PLATFORM	U	4.00	$1,600.00	$6,400.00	$600.00	$2,400.00		
304.3	CRUSHED GRAVEL (F)	CY	42.00	$75.00	$3,150.00	$80.00	$3,360.00		
403.11943	HBP-1/2" SURFACE MIX, MACHINE METHOD, HIGH STRENGTH	TON	230.00	$130.00	$29,900.00	$236.00	$54,280.00		
403.12	HBP-HAND METHOD	TON	15.00	$300.00	$4,500.00	$500.00	$7,500.00		
403.16	PAVEMENT JOINT ADHESIVE	LF	1,670.00	$3.00	$5,010.00	$3.50	$5,845.00		
403.21053	HBP-3/8" MIX, MACHINE METHOD (BRIDGE BASE)	TON	55.00	$250.00	$13,750.00	$394.00	$21,670.00		
403.26	PAVEMENT JOINT ADHESIVE (BRIDGE BASE)	LF	975.00	$2.00	$1,950.00	$3.50	$3,412.50		
410.22	ASPHALT EMULSION FOR TACK COAT	GAL	170.00	$15.00	$2,550.00	$19.00	$3,230.00		
411.3	PLANT MIX SURFACE TREATMENT, PAVER SHIM	TON	70.00	$150.00	$10,500.00	$236.00	$16,520.00		
417.	COLD PLANING BITUMINOUS SURFACES	SY	1,750.00	$15.00	$26,250.00	$12.00	$21,000.00		
500.02	ACCESS FOR BRIDGE CONSTRUCTION	U	1.00	$525,000.00	$525,000.00	$1,910,656.00	$1,910,656.00		
502.	REMOVAL OF EXISTING BRIDGE STRUCTURE	U	1.00	$550,000.00	$550,000.00	$1,238,522.00	$1,238,522.00		
503.201	COFFERDAMS	U	1.00	$75,000.00	$75,000.00	$305,656.00	$305,656.00		
504.1	COMMON BRIDGE EXCAVATION (F)	CY	51.00	$70.00	$3,570.00	$79.00	$4,029.00		
511.00	CONCRETE BRIDGE DECK PAVEMENT REMOVAL (F)	SY	920.00	$22.00	$20,240.00	$33.00	$30,360.00		
511.02	PREPARATION FOR PARTIAL DEPTH CONCRETE BRIDGE DECK REPAIRS	SY	100.00	$500.00	$50,000.00	$770.00	$77,000.00		
511.03	PREPARATION FOR FULL DEPTH CONCRETE BRIDGE DECK REPAIRS	SY	30.00	$750.00	$22,500.00	$1,500.00	$45,000.00		
512.02	PREPARATION FOR CONCRETE REPAIRS, CLASS II	SY	115.00	$1,000.00	$115,000.00	$2,800.00	$322,000.00		
520.01	CONCRETE CLASS AA	CY	20.00	$1,000.00	$20,000.00	$385.00	$7,700.00		
520.0201	CONCRETE CLASS AA, ABOVE FOOTINGS	CY	5.00	$2,800.00	$14,000.00	$1,564.00	$7,820.00		
520.02012	CONCRETE CLASS AA, ABOVE FOOTINGS (ABUT/WALL/PIER REPAIR)	CY	20.00	$3,500.00	$70,000.00	$2,444.00	$48,880.00		

ABC Bid Data

ASHLAND - BRIDGEWATER

24904

X-A003(003)

Item No.	Description	Unit	Quantity	PSAE Unit Price	PSAE Total	SICARD INC, J P 234 GLOVER ROAD BARTON, VT 05822 Unit Price	SICARD INC, J P Total	Unit Price	Total
520.7002	CONCRETE BRIDGE DECK (QC/QA) (F)	CY	195.00	$1,750.00	$341,250.00	$3,440.00	$670,800.00		
520.7102	CONCRETE BRIDGE DECK (QC/QA) (F)	CY	340.00	$1,200.00	$408,000.00	$2,915.00	$991,100.00		
526.3	HIGH MOLECULAR WEIGHT METHACRYLATE CRACK SEALER	GAL	8.00	$1,000.00	$8,000.00	$505.00	$4,040.00		
534.3	WATER REPELLENT (SILANE/SILOXANE)	GAL	185.00	$150.00	$27,750.00	$83.00	$15,355.00		
538.2	BARRIER MEMBRANE, PEEL AND STICK - VERTICAL SURFACES (F)	SY	30.00	$100.00	$3,000.00	$60.00	$1,800.00		
538.6	BARRIER MEMBRANE, HEAT WELDED - MACHINE METHOD (F)	SY	919.00	$50.00	$45,950.00	$41.00	$37,679.00		
540.42	SCUPPER (FRP)	EA	6.00	$10,000.00	$60,000.00	$7,500.00	$45,000.00		
540.512	GALVANIC CORROSION PROTECTION SYSTEM (DISCRETE ANODES)	EA	800.00	$30.00	$24,000.00	$27.00	$21,600.00		
544.2	REINFORCING STEEL, EPOXY COATED (F)	LB	41,317.00	$3.00	$123,951.00	$1.80	$74,370.60		
544.21	REINFORCING STEEL, EPOXY COATED, MECHANICAL CONNECTORS (F)	LB	348.00	$8.00	$2,784.00	$17.00	$5,916.00		
544.43	REINFORCING STEEL - CONTINUOUSLY GALVANIZED (F)	LB	17,236.00	$5.00	$86,180.00	$2.40	$41,366.40		
547.	SHEAR CONNECTORS (F)	EA	10,068.00	$10.00	$100,680.00	$12.00	$120,816.00		
550.1	STRUCTURAL STEEL (F)	LB	65.00	$100.00	$6,500.00	$240.00	$15,600.00		
550.1901	TEMPORARY STRUCTURE SUPPORT SYSTEM	U	1.00	$300,000.00	$300,000.00	$867,772.00	$867,772.00		
550.1902	TEMPORARY STRUCTURE SUPPORT SYSTEM	U	1.00	$250,000.00	$250,000.00	$83,220.00	$83,220.00		
552.2	REHABILITATION OF EXPANSION BRIDGE SHOES	EA	4.00	$5,000.00	$20,000.00	$10,092.00	$40,368.00		
555.3	STEEL GRID FLOOR (FILLED) (F)	SF	15,170.00	$100.00	$1,517,000.00	$138.00	$2,093,460.00		
559.41	ASPHALTIC PLUG FOR CRACK CONTROL (F)	LF	54.00	$160.00	$8,640.00	$150.00	$8,100.00		
560.1001	PREFABRICATED COMPRESSION SEAL EXPANSION JOINT (F)	LF	31.00	$1,000.00	$31,000.00	$1,388.00	$43,028.00		
561.1001	PREFABRICATED STRIP SEAL EXPANSION JOINT (F)	LF	31.00	$1,200.00	$37,200.00	$1,388.00	$43,028.00		
561.1201	PREFABRICATED STRIP SEAL EXPANSION JOINT W/ PLOW PLATES (F)	LF	31.00	$1,500.00	$46,500.00	$2,337.00	$72,447.00		
562.1	SILICONE JOINT SEALANT (F)	LF	18.00	$40.00	$720.00	$51.00	$918.00		
563.24	BRIDGE RAIL T4	LF	1,405.00	$300.00	$421,500.00	$310.00	$435,550.00		
563.241	BRIDGE RAIL T4 WITH PROTECTIVE SCREENING	LF	203.00	$380.00	$77,140.00	$405.00	$82,215.00		
565.242	BRIDGE APPROACH RAIL T4 (STEEL POSTS)	U	4.00	$12,500.00	$50,000.00	$13,390.00	$53,560.00		

New Hampshire DOT
Department of Transportation

ABC Bid Data

ASHLAND - BRIDGEWATER
24904
X-A003(003)

Item No.	Description	Unit	Quantity	PS&E Unit Price	PS&E Total	SICARD INC, J P 234 GLOVER ROAD BARTON, VT 05822 Unit Price	SICARD INC, J P Total	Unit Price	Total
606.417	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL	LF	140.00	$50.00	$7,000.00	$83.00	$11,620.00		
606.41741	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL - BRIDGE	LF	900.00	$90.00	$81,000.00	$121.00	$108,900.00		
606.9523	TEMP. IMPACT ATTENUATION DEVICE (NON-REDIRECTIVE) TEST LEVEL 3	U	2.00	$6,500.00	$13,000.00	$8,894.00	$17,788.00		
609.01	STRAIGHT GRANITE CURB	LF	145.00	$55.00	$7,975.00	$54.00	$7,830.00		
609.5	RESET GRANITE CURB	LF	60.00	$75.00	$4,500.00	$48.00	$2,880.00		
616.171	PORTABLE TRAFFIC SIGNALS (PTS) SYSTEM	U	1.00	$60,000.00	$60,000.00	$119,501.00	$119,501.00		
618.61	UNIFORMED OFFICERS WITH VEHICLE	$	25,000.00	$1.00	$25,000.00	$1.00	$25,000.00		
618.7	FLAGGERS	HR	1,500.00	$60.00	$90,000.00	$53.00	$79,500.00		
619.1	MAINTENANCE OF TRAFFIC	U	1.00	$50,000.00	$50,000.00	$226,460.00	$226,460.00		
628.2	SAWED BITUMINOUS PAVEMENT	LF	145.00	$7.00	$1,015.00	$5.00	$725.00		
628.5	DIAMOND GRINDING CONCRETE PAVEMENT	SY	1,365.00	$50.00	$68,250.00	$19.00	$25,935.00		
632.0104	RETROREFLECTIVE PAINT PAVE. MARKING, 4" LINE	LF	13,200.00	$1.00	$13,200.00	$0.35	$4,620.00		
632.1104	PREFORMED RETROREFLECTIVE TAPE, TYPE I (REMOVABLE) 4" LINE	LF	4,100.00	$2.50	$10,250.00	$3.00	$12,300.00		
632.1118	PREFORMED RETROREFLECTIVE TAPE, TYPE I (REMOVABLE) 18" LINE	LF	85.00	$8.00	$680.00	$12.00	$1,020.00		
632.1306	BLACKOUT PAVEMENT MARKING TAPE, TYPE I (REMOVABLE), 6"	LF	1,800.00	$3.00	$5,400.00	$4.00	$7,200.00		
632.5118	PREFORMED RETROREFLECTIVE TAPE, LEVEL I, 18" LINE	LF	45.00	$10.00	$450.00	$20.00	$900.00		
632.911	OBLITERATE PAVE. MARKING LINE, 12" WIDE & UNDER	LF	4,800.00	$1.00	$4,800.00	$1.00	$4,800.00		
645.44	TEMPORARY SLOPE MATTING TYPE D (WILDLIFE FRIENDLY)	SY	500.00	$3.50	$1,750.00	$3.00	$1,500.00		
645.512	COMPOST SOCK FOR PERIMETER BERM	LF	2,800.00	$6.00	$16,800.00	$7.00	$19,600.00		
645.531	SILT FENCE	LF	2,800.00	$4.00	$11,200.00	$5.00	$14,000.00		
645.611	BONDED FIBER MATRIX (BFM)	LB	1,550.00	$2.00	$3,100.00	$2.00	$3,100.00		
645.7	STORM WATER POLLUTION PREVENTION PLAN	U	1.00	$10,000.00	$10,000.00	$4,200.00	$4,200.00		
645.71	WATER QUALITY MONITORING, INSPECTION AND REPORTING	HR	450.00	$130.00	$58,500.00	$168.00	$75,600.00		
645.72	FINAL WETLAND IMPACT REPORT	U	1.00	$3,500.00	$3,500.00	$2,400.00	$2,400.00		
645.73	STREAM DIVERSION PLAN	U	1.00	$10,000.00	$10,000.00	$1,800.00	$1,800.00		
645.75	COLD WEATHER STABILIZATION PLAN	U	1.00	$5,000.00	$5,000.00	$1,440.00	$1,440.00		

ABC Bid Data

ASHLAND - BRIDGEWATER

24904

X-A003(003)

Item No.	Description	Unit	Quantity	PS&E Unit Price	PS&E Total	SICARD INC, J P 234 OLOVER ROAD BARTON, VT 05822 Unit Price	SICARD INC, J P Total	Unit Price	Total
646.41	TURF ESTABLISHMENT WITH MULCH, TACKIFIERS AND HUMUS	SY	5,800.00	$10.00	$58,000.00	$1.00	$5,800.00		
670.104	TEMPORARY PORTABLE LIGHTING	U	2.00	$5,000.00	$10,000.00	$18,182.00	$36,364.00		
670.95	TEMPORARY SAFETY FENCE	LF	550.00	$30.00	$16,500.00	$5.00	$2,750.00		
692.	MOBILIZATION	U	1.00	$522,000.00	$522,000.00	$1,769,673.00	$1,769,673.00		
698.13	FIELD OFFICE TYPE C	MON	24.00	$2,500.00	$60,000.00	$1,000.00	$24,000.00		
699.	MISCELLANEOUS TEMPORARY EROSION AND SEDIMENT CONTROL	$	10,000.00	$1.00	$10,000.00	$1.00	$10,000.00		
1002.1	REPAIRS OR REPLACEMENTS AS NEEDED - BRIDGE STRUCTURES	$	140,000.00	$1.00	$140,000.00	$1.00	$140,000.00		
1010.01	STEEL COST ADJUSTMENT	$	22,500.00	$1.00	$22,500.00	$1.00	$22,500.00		
1010.15	FUEL ADJUSTMENT	$	70,000.00	$1.00	$70,000.00	$1.00	$70,000.00		
1010.41	QUALITY CONTROL QUALITY ASSURANCE (QC/QA) FOR CONCRETE	$	48,000.00	$1.00	$48,000.00	$1.00	$48,000.00		
			Totals:		$7,092,695.00		$12,923,145.50		
			Alt. Totals:						
			Totals:		$7,092,695.00		$12,923,145.50		

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
Items								
201.881	INVASIVE SPECIES CONTROL TYPE I	SY	50.00	$53.00	$2,650.00	$10.00	$500.00	$2,150.00
202.6	CURB REMOVAL FOR SALVAGE	LF	130.00	$15.00	$1,950.00	$12.00	$1,560.00	$390.00
202.7	REMOVAL OF GUARDRAIL	LF	170.00	$17.00	$2,890.00	$25.00	$4,250.00	($1,360.00)
203.553	PORTABLE TRAFFIC SIGNAL PLATFORM	U	4.00	$600.00	$2,400.00	$1,600.00	$6,400.00	($4,000.00)
304.3	CRUSHED GRAVEL (F)	CY	42.00	$80.00	$3,360.00	$75.00	$3,150.00	$210.00
403.11943	HBP-1/2" SURFACE MIX, MACHINE METHOD, HIGH STRENGTH	TON	230.00	$236.00	$54,280.00	$130.00	$29,900.00	$24,380.00
403.12	HBP-HAND METHOD	TON	15.00	$500.00	$7,500.00	$300.00	$4,500.00	$3,000.00
403.16	PAVEMENT JOINT ADHESIVE	LF	1,670.00	$3.50	$5,845.00	$3.00	$5,010.00	$835.00
403.21053	HBP-3/8" MIX, MACHINE METHOD (BRIDGE BASE)	TON	55.00	$394.00	$21,670.00	$250.00	$13,750.00	$7,920.00
403.26	PAVEMENT JOINT ADHESIVE (BRIDGE BASE)	LF	975.00	$3.50	$3,412.50	$2.00	$1,950.00	$1,462.50
410.22	ASPHALT EMULSION FOR TACK COAT	GAL	170.00	$19.00	$3,230.00	$15.00	$2,550.00	$680.00
411.3	PLANT MIX SURFACE TREATMENT, PAVER SHIM	TON	70.00	$236.00	$16,520.00	$150.00	$10,500.00	$6,020.00
417.	COLD PLANING BITUMINOUS SURFACES	SY	1,750.00	$12.00	$21,000.00	$15.00	$26,250.00	($5,250.00)
500.02	ACCESS FOR BRIDGE CONSTRUCTION	U	1.00	$1,910,656.00	$1,910,656.00	$525,000.00	$525,000.00	$1,385,656.00

New Hampshire DOT
Department of Transportation

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
502.	REMOVAL OF EXISTING BRIDGE STRUCTURE	U	1.00	$1,238,522.00	$1,238,522.00	$550,000.00	$550,000.00	$688,522.00
503.201	COFFERDAMS	U	1.00	$305,656.00	$305,656.00	$75,000.00	$75,000.00	$230,656.00
504.1	COMMON BRIDGE EXCAVATION (F)	CY	51.00	$79.00	$4,029.00	$70.00	$3,570.00	$459.00
511.00	CONCRETE BRIDGE DECK PAVEMENT REMOVAL (F)	SY	920.00	$33.00	$30,360.00	$22.00	$20,240.00	$10,120.00
511.02	PREPARATION FOR PARTIAL DEPTH CONCRETE BRIDGE DECK REPAIRS	SY	100.00	$770.00	$77,000.00	$500.00	$50,000.00	$27,000.00
511.03	PREPARATION FOR FULL DEPTH CONCRETE BRIDGE DECK REPAIRS	SY	30.00	$1,500.00	$45,000.00	$750.00	$22,500.00	$22,500.00
512.02	PREPARATION FOR CONCRETE REPAIRS, CLASS II	SY	115.00	$2,800.00	$322,000.00	$1,000.00	$115,000.00	$207,000.00
520.01	CONCRETE CLASS AA	CY	20.00	$385.00	$7,700.00	$1,000.00	$20,000.00	($12,300.00)
520.0201	CONCRETE CLASS AA, ABOVE FOOTINGS	CY	5.00	$1,564.00	$7,820.00	$2,800.00	$14,000.00	($6,180.00)
520.02012	CONCRETE CLASS AA, ABOVE FOOTINGS (ABUT/WALL/PIER REPAIR)	CY	20.00	$2,444.00	$48,880.00	$3,500.00	$70,000.00	($21,120.00)
520.7002	CONCRETE BRIDGE DECK (QC/QA) (F)	CY	195.00	$3,440.00	$670,800.00	$1,750.00	$341,250.00	$329,550.00
520.7102	CONCRETE BRIDGE DECK (QC/QA) (F)	CY	340.00	$2,915.00	$991,100.00	$1,200.00	$408,000.00	$583,100.00
526.3	HIGH MOLECULAR WEIGHT METHACRYLATE CRACK SEALER	GAL	8.00	$505.00	$4,040.00	$1,000.00	$8,000.00	($3,960.00)
534.3	WATER REPELLENT (SILANE/SILOXANE)	GAL	185.00	$83.00	$15,355.00	$150.00	$27,750.00	($12,395.00)
538.2	BARRIER MEMBRANE, PEEL AND STICK - VERTICAL SURFACES (F)	SY	30.00	$60.00	$1,800.00	$100.00	$3,000.00	($1,200.00)
538.6	BARRIER MEMBRANE, HEAT WELDED - MACHINE METHOD (F)	SY	919.00	$41.00	$37,679.00	$50.00	$45,950.00	($8,271.00)

New Hampshire DOT
Department of Transportation

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
540.42	SCUPPER (FRP)	EA	6.00	$7,500.00	$45,000.00	$10,000.00	$60,000.00	($15,000.00)
540.512	GALVANIC CORROSION PROTECTION SYSTEM (DISCRETE ANODES)	EA	800.00	$27.00	$21,600.00	$30.00	$24,000.00	($2,400.00)
544.2	REINFORCING STEEL, EPOXY COATED (F)	LB	41,317.00	$1.80	$74,370.60	$3.00	$123,951.00	($49,580.40)
544.21	REINFORCING STEEL, EPOXY COATED, MECHANICAL CONNECTORS (F)	LB	348.00	$17.00	$5,916.00	$8.00	$2,784.00	$3,132.00
544.43	REINFORCING STEEL - CONTINUOUSLY GALVANIZED (F)	LB	17,236.00	$2.40	$41,366.40	$5.00	$86,180.00	($44,813.60)
547.	SHEAR CONNECTORS (F)	EA	10,068.00	$12.00	$120,816.00	$10.00	$100,680.00	$20,136.00
550.1	STRUCTURAL STEEL (F)	LB	65.00	$240.00	$15,600.00	$100.00	$6,500.00	$9,100.00
550.1901	TEMPORARY STRUCTURE SUPPORT SYSTEM	U	1.00	$867,772.00	$867,772.00	$300,000.00	$300,000.00	$567,772.00
550.1902	TEMPORARY STRUCTURE SUPPORT SYSTEM	U	1.00	$83,220.00	$83,220.00	$250,000.00	$250,000.00	($166,780.00)
552.2	REHABILITATION OF EXPANSION BRIDGE SHOES	EA	4.00	$10,092.00	$40,368.00	$5,000.00	$20,000.00	$20,368.00
555.3	STEEL GRID FLOOR (FILLED) (F)	SF	15,170.00	$138.00	$2,093,460.00	$100.00	$1,517,000.00	$576,460.00
559.41	ASPHALTIC PLUG FOR CRACK CONTROL (F)	LF	54.00	$150.00	$8,100.00	$160.00	$8,640.00	($540.00)
560.1001	PREFABRICATED COMPRESSION SEAL EXPANSION JOINT (F)	LF	31.00	$1,388.00	$43,028.00	$1,000.00	$31,000.00	$12,028.00
561.1001	PREFABRICATED STRIP SEAL EXPANSION JOINT (F)	LF	31.00	$1,388.00	$43,028.00	$1,200.00	$37,200.00	$5,828.00
561.1201	PREFABRICATED STRIP SEAL EXPANSION JOINT W/ PLOW PLATES (F)	LF	31.00	$2,337.00	$72,447.00	$1,500.00	$46,500.00	$25,947.00
562.1	SILICONE JOINT SEALANT (F)	LF	18.00	$51.00	$918.00	$40.00	$720.00	$198.00

New Hampshire DOT
Department of Transportation

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
563.24	BRIDGE RAIL T4	LF	1,405.00	$310.00	$435,550.00	$300.00	$421,500.00	$14,050.00
563.241	BRIDGE RAIL T4 WITH PROTECTIVE SCREENING	LF	203.00	$405.00	$82,215.00	$380.00	$77,140.00	$5,075.00
565.242	BRIDGE APPROACH RAIL T4 (STEEL POSTS)	U	4.00	$13,390.00	$53,560.00	$12,500.00	$50,000.00	$3,560.00
606.417	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL	LF	140.00	$83.00	$11,620.00	$50.00	$7,000.00	$4,620.00
606.41741	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL - BRIDGE	LF	900.00	$121.00	$108,900.00	$90.00	$81,000.00	$27,900.00
606.9523	TEMP. IMPACT ATTENUATION DEVICE (NON-REDIRECTIVE) TEST LEVEL 3	U	2.00	$8,894.00	$17,788.00	$6,500.00	$13,000.00	$4,788.00
609.01	STRAIGHT GRANITE CURB	LF	145.00	$54.00	$7,830.00	$55.00	$7,975.00	($145.00)
609.5	RESET GRANITE CURB	LF	60.00	$48.00	$2,880.00	$75.00	$4,500.00	($1,620.00)
616.171	PORTABLE TRAFFIC SIGNALS (PTS) SYSTEM	U	1.00	$119,501.00	$119,501.00	$60,000.00	$60,000.00	$59,501.00
618.61	UNIFORMED OFFICERS WITH VEHICLE	$	25,000.00	$1.00	$25,000.00	$1.00	$25,000.00	$0.00
618.7	FLAGGERS	HR	1,500.00	$53.00	$79,500.00	$60.00	$90,000.00	($10,500.00)
619.1	MAINTENANCE OF TRAFFIC	U	1.00	$226,460.00	$226,460.00	$50,000.00	$50,000.00	$176,460.00
628.2	SAWED BITUMINOUS PAVEMENT	LF	145.00	$5.00	$725.00	$7.00	$1,015.00	($290.00)
628.5	DIAMOND GRINDING CONCRETE PAVEMENT	SY	1,365.00	$19.00	$25,935.00	$50.00	$68,250.00	($42,315.00)
632.0104	RETROREFLECTIVE PAINT PAVE. MARKING, 4" LINE	LF	13,200.00	$0.35	$4,620.00	$1.00	$13,200.00	($8,580.00)
632.1104	PREFORMED RETROREFLECTIVE TAPE, TYPE I (REMOVABLE) 4" LINE	LF	4,100.00	$3.00	$12,300.00	$2.50	$10,250.00	$2,050.00

New Hampshire DOT
Department of Transportation

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
632.1118	PREFORMED RETROREFLECTIVE TAPE, TYPE I (REMOVABLE) 18" LINE	LF	85.00	$12.00	$1,020.00	$8.00	$680.00	$340.00
632.1306	BLACKOUT PAVEMENT MARKING TAPE, TYPE I (REMOVABLE), 6"	LF	1,800.00	$4.00	$7,200.00	$3.00	$5,400.00	$1,800.00
632.5118	PREFORMED RETROREFLECTIVE TAPE, LEVEL I, 18" LINE	LF	45.00	$20.00	$900.00	$10.00	$450.00	$450.00
632.911	OBLITERATE PAVE. MARKING LINE, 12" WIDE & UNDER	LF	4,800.00	$1.00	$4,800.00	$1.00	$4,800.00	$0.00
645.44	TEMPORARY SLOPE MATTING TYPE D (WILDLIFE FRIENDLY)	SY	500.00	$3.00	$1,500.00	$3.50	$1,750.00	($250.00)
645.512	COMPOST SOCK FOR PERIMETER BERM	LF	2,800.00	$7.00	$19,600.00	$6.00	$16,800.00	$2,800.00
645.531	SILT FENCE	LF	2,800.00	$5.00	$14,000.00	$4.00	$11,200.00	$2,800.00
645.611	BONDED FIBER MATRIX (BFM)	LB	1,550.00	$2.00	$3,100.00	$2.00	$3,100.00	$0.00
645.7	STORM WATER POLLUTION PREVENTION PLAN	U	1.00	$4,200.00	$4,200.00	$10,000.00	$10,000.00	($5,800.00)
645.71	WATER QUALITY MONITORING, INSPECTION AND REPORTING	HR	450.00	$168.00	$75,600.00	$130.00	$58,500.00	$17,100.00
645.72	FINAL WETLAND IMPACT REPORT	U	1.00	$2,400.00	$2,400.00	$3,500.00	$3,500.00	($1,100.00)
645.73	STREAM DIVERSION PLAN	U	1.00	$1,800.00	$1,800.00	$10,000.00	$10,000.00	($8,200.00)
645.75	COLD WEATHER STABILIZATION PLAN	U	1.00	$1,440.00	$1,440.00	$5,000.00	$5,000.00	($3,560.00)
646.41	TURF ESTABLISHMENT WITH MULCH, TACKIFIERS AND HUMUS	SY	5,800.00	$1.00	$5,800.00	$10.00	$58,000.00	($52,200.00)
670.104	TEMPORARY PORTABLE LIGHTING	U	2.00	$18,182.00	$36,364.00	$5,000.00	$10,000.00	$26,364.00
670.95	TEMPORARY SAFETY FENCE	LF	550.00	$5.00	$2,750.00	$30.00	$16,500.00	($13,750.00)

PS&E Comparison

ASHLAND - BRIDGEWATER
24904
X-A003(003)

				A-Bidder		PS&E		
Item No.	Description	Unit	Quantity	Unit Price	Total	Unit Price	Total	A-PS&E Difference
692.	MOBILIZATION	U	1.00	$1,769,673.00	$1,769,673.00	$522,000.00	$522,000.00	$1,247,673.00
698.13	FIELD OFFICE TYPE C	MON	24.00	$1,000.00	$24,000.00	$2,500.00	$60,000.00	($36,000.00)
699.	MISCELLANEOUS TEMPORARY EROSION AND SEDIMENT CONTROL	$	10,000.00	$1.00	$10,000.00	$1.00	$10,000.00	$0.00
1002.1	REPAIRS OR REPLACEMENTS AS NEEDED - BRIDGE STRUCTURES	$	140,000.00	$1.00	$140,000.00	$1.00	$140,000.00	$0.00
1010.01	STEEL COST ADJUSTMENT	$	22,500.00	$1.00	$22,500.00	$1.00	$22,500.00	$0.00
1010.15	FUEL ADJUSTMENT	$	70,000.00	$1.00	$70,000.00	$1.00	$70,000.00	$0.00
1010.41	QUALITY CONTROL QUALITY ASSURANCE (QC/QA) FOR CONCRETE	$	48,000.00	$1.00	$48,000.00	$1.00	$48,000.00	$0.00
			Total:		$12,923,145.50		$7,092,695.00	$5,830,450.50

August 26, 2024

SUPPLEMENTAL PROJECT INFORMATION SHEET

DESCRIPTION: This project consists of rehabilitation work on the bridge at the Ashland-Bridgewater town line (Ashland Br. No. 076/080) carrying US 3 and NH 25 over Pemigewasset River and NHRR along with minor associated approach roadway work.

The work limits begin approximately 190' west of the west abutment and continue easterly across the bridge approximately 1,274'. Rehabilitation work will consist of removing and replacing truss span concrete filled grid deck and brush curbs, trestle span bridge deck partial removal and reconstruction including brush curbs, and trestle span partial- and full-depth deck repair. Expansion joints will be replaced. Bridge rail will be replaced with T4 steel rail to meet current standards. Proposed rail anchorage on truss spans has been modified from crash test anchorage to allow for installation and attachment to the replacement concrete filled steel grid deck. Also, substructure repairs will be performed.

FEDERAL FUNDING: 80% (Brdg-T1/2-R&R) with anticipated utilization of Turnpike Toll Credits for the State's 20% match.

CONTINGENCY: The contingency amount is proposed to be 10%. The extent of this work has been estimated, but the full extent of the work won't be fully known until the pier repairs, as well as repairs to other parts of the bridge, are underway. These factors increase the risk of overruns.

PROJECT INITIATED: 2017 Ten Year Plan (TYP)

PROJECT EXPLANATION: The purpose of the project is to extend the useful life of the bridge by performing bridge rehabilitation and preservation activities. The bridge rehabilitation/preservation work will extend the functional life of the bridges and delay regression to a lower condition state.

The existing bridge, built in 1937, is a nine (9) span structure consisting of seven (7) steel stringer/floor-beam trestle approach spans and two (2) steel deck truss main spans with a total length of approximately 800 feet. The last major rehabilitation work was in 1987. The bridge is not on the Redlist and is #22 on the 2023 State Bridge Rehab and Replace Priority List. This bridge is currently scheduled for construction funding in FY 2024 utilizing T1-2 Rehab-Rcn funding. This project is between a Bridge Preservation and Bridge Rehabilitation effort.

TRAFFIC IMPLICATION: One lane of alternating, two-way traffic during both phases of work for two construction seasons.

FINAL COMPLETION DATE: October 23, 2026.

ASHLAND/BRIDGEWATER
US 3, NH 25/PEMIGEWASSET RIVER/NHRR

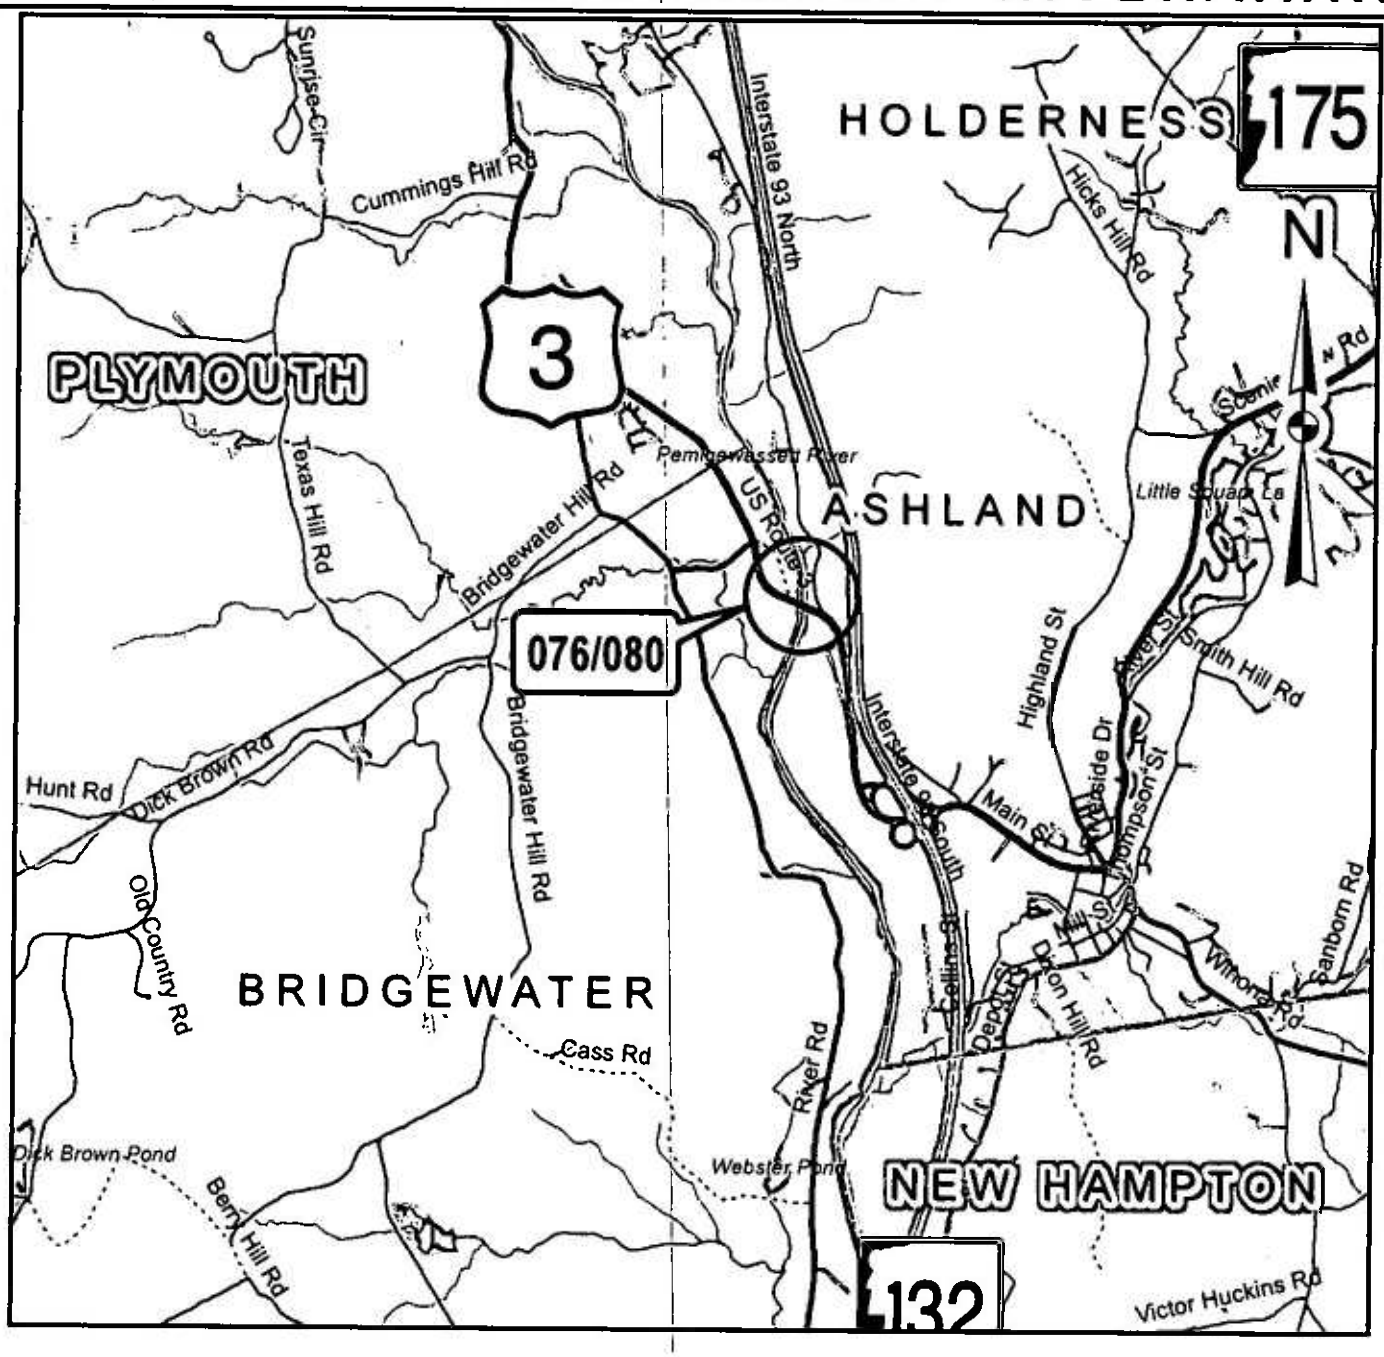

1 ½ 0 1 2 Miles

LEGEND

- Streams
- Water Bodies
- US Routes
- State Routes
- Interstates
- Local Roads
- Town Boundary

New Hampshire DOT
Department of Transportation

State #: 24904
Federal #: X-A003 (003)

LOCATION MAP

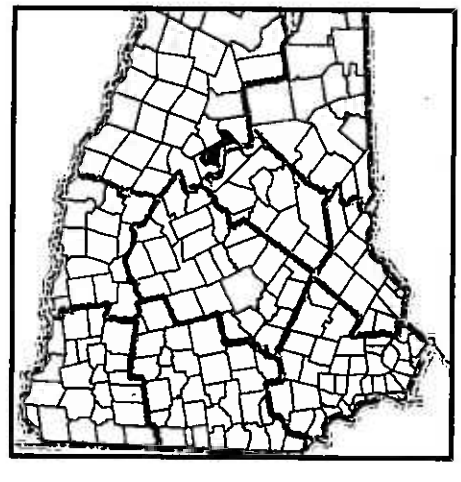

State of New Hampshire

Department of State

CERTIFICATE

I, David M. Scanlan, Secretary of State of the State of New Hampshire, do hereby certify that J. P. SICARD, INC. is a Vermont Profit Corporation registered to transact business in New Hampshire on March 06, 2002. I further certify that all fees and documents required by the Secretary of State's office have been received and is in good standing as far as this office is concerned.

Business ID: **400027**

Certificate Number: **0006774115**

IN TESTIMONY WHEREOF,

I hereto set my hand and cause to be affixed the Seal of the State of New Hampshire, this 6th day of September A.D. 2024.

David M. Scanlan

Secretary of State

P.O. Box 508, Barton, Vermont, 05822 • Phone: (802) 525-9506 • Fax (802) 525-4616

RESOLUTION OF SOLE SHAREHOLDER IN LIEU OF

2024 ANNUAL MEETING OF

J. P. SICARD, INC.

The undersigned, being the sole Shareholder of J. P. Sicard, Inc., hereby consent and agree, pursuant to 11A V.S.A. § 7.04, that the following actions may be taken forthwith and shall become effective without the necessity of calling a formal Annual Meeting of the Shareholder of the Corporation:

RESOLVED, that the following persons are authorized to bid, enter into and sign contracts for the corporation during the ensuing year and until his successor is appointed: Jason P. Sicard, Paul A. Sicard and George Carpenter.

Dated at the Town of Barton, Vermont, this, 2nd day of January 2024.

This vote has not been amended or repealed and remains in full force and effect as of October 21st, 2024.

Jason Sicard - President

JPSICAR-02 HENCH1

ACORD

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 10/25/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
Digital Insurance LLC- Rutland, VT
98 Merchants Row
Rutland, VT 05701

CONTACT NAME:
PHONE (A/C, No, Ext): (802) 775-2311 FAX (A/C, No): (802) 775-8246
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A : Travelers Casual Ins Co of Am	19046
INSURER B :	
INSURER C :	
INSURER D :	
INSURER E :	
INSURER F :	

INSURED
JP Sicard, Inc.
Kingdom Gravel & Aggregate
PO Box 19
Barton, VT 05822

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	X COMMERCIAL GENERAL LIABILITY CLAIMS-MADE X OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: POLICY X PRO-JECT LOC OTHER:	X		CO8T790479	12/31/2023	12/31/2024	EACH OCCURRENCE	$ 1,000,000
							DAMAGE TO RENTED PREMISES (Ea occurrence)	$ 300,000
							MED EXP (Any one person)	$ 10,000
							PERSONAL & ADV INJURY	$ 1,000,000
							GENERAL AGGREGATE	$ 2,000,000
							PRODUCTS - COMP/OP AGG	$ 2,000,000
								$
A	AUTOMOBILE LIABILITY X ANY AUTO OWNED AUTOS ONLY / SCHEDULED AUTOS HIRED AUTOS ONLY / NON-OWNED AUTOS ONLY			8108T790467	12/31/2023	12/31/2024	COMBINED SINGLE LIMIT (Ea accident)	$ 1,000,000
							BODILY INJURY (Per person)	$
							BODILY INJURY (Per accident)	$
							PROPERTY DAMAGE (Per accident)	$
								$
A	X UMBRELLA LIAB X OCCUR EXCESS LIAB CLAIMS-MADE DED X RETENTION $ 10,000			CUP8T875611	12/31/2023	12/31/2024	EACH OCCURRENCE	$ 10,000,000
							AGGREGATE	$ 10,000,000
								$
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) Y/N Y If yes, describe under DESCRIPTION OF OPERATIONS below	N/A		UB8T791083	12/31/2023	12/31/2024	X PER STATUTE / OTH-ER	
							E.L. EACH ACCIDENT	$ 1,000,000
							E.L. DISEASE - EA EMPLOYEE	$ 1,000,000
							E.L. DISEASE - POLICY LIMIT	$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
Workers' Compensation statutory coverage applies in VT, NH and ME. Jason Sicard is an excluded officer.

JP Sicard's 10,000,000 Umbrella creates the following limits for Commercial General Liability
$10,000,000 Bodily Injury and/or Property Damage Each Occurrence
$12,000,000 General Aggregate – Includes per project Aggregate Endorsement
$12,000,000 Products /Completed Operations Aggregate

SEE ATTACHED ACORD 101

CERTIFICATE HOLDER

State of New Hampshire DOT
7 Hazen Drive
Concord, NH 03301

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2015 ACORD CORPORATION. All rights reserved.
The ACORD name and logo are registered marks of ACORD

AGENCY CUSTOMER ID: JPSICAR-02 HENCH1

LOC #: 1

ADDITIONAL REMARKS SCHEDULE

AGENCY Digital Insurance LLC- Rutland, VT	NAMED INSURED JP Sicard, Inc. Kingdom Gravel & Aggregate PO Box 19 Barton, VT 05822
POLICY NUMBER SEE PAGE 1	
CARRIER SEE PAGE 1 — NAIC CODE SEE P 1	EFFECTIVE DATE: SEE PAGE 1

ADDITIONAL REMARKS

THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,

FORM NUMBER: ACORD 25 FORM TITLE: Certificate of Liability Insurance

Description of Operations/Locations/Vehicles:
The State of New Hampshire DOT is named additional insured with respect to general liability when required in written contract RE: Ashland-Bridgewater 24904

© 2008 ACORD CORPORATION. All rights reserved.
The ACORD name and logo are registered marks of ACORD

JPSICAR-01 HENCH1

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 11/14/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
Digital Insurance LLC- Rutland, VT
98 Merchants Row
Rutland, VT 05701

CONTACT NAME:
PHONE (A/C, No, Ext): (802) 775-2311 FAX (A/C, No): (802) 775-8246
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A : Travelers Commercial Ins Co	36161
INSURER B :	
INSURER C :	
INSURER D :	
INSURER E :	
INSURER F :	

INSURED
State of New Hampshire Railroad
Plymouth and Lincoln Railroad
Corporation, their affiliates, successors and assigns
7 Hazen Drive
Concord, NH 03302

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	COMMERCIAL GENERAL LIABILITY						EACH OCCURRENCE	$ 5,000,000
	CLAIMS-MADE / OCCUR			SPS1X432906	10/21/2024	10/21/2025	DAMAGE TO RENTED PREMISES (Ea occurrence)	$
	X RRP						MED EXP (Any one person)	$
							PERSONAL & ADV INJURY	$
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE	$ 10,000,000
	POLICY / PRO-JECT / LOC						PRODUCTS - COMP/OP AGG	$
	OTHER:							$
	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident)	$
	ANY AUTO						BODILY INJURY (Per person)	$
	OWNED AUTOS ONLY / SCHEDULED AUTOS						BODILY INJURY (Per accident)	$
	HIRED AUTOS ONLY / NON-OWNED AUTOS ONLY						PROPERTY DAMAGE (Per accident)	$
								$
	UMBRELLA LIAB / OCCUR						EACH OCCURRENCE	$
	EXCESS LIAB / CLAIMS-MADE						AGGREGATE	$
	DED / RETENTION $							$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY						PER STATUTE / OTH-ER	
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) Y / N	N / A					E.L. EACH ACCIDENT	$
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE	$
							E.L. DISEASE - POLICY LIMIT	$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
RE: Ashland-Bridgewater X-A003-(003) 24904

CERTIFICATE HOLDER

State of New Hampshire DOT
State of New Hampshire Railroad, Plymouth and Lincoln Rail
Corporation, their affiliates, successors and assigns
7 Hazen Drive
Concord, NH 03306

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2015 ACORD CORPORATION. All rights reserved.
The ACORD name and logo are registered marks of ACORD

JPSICAR-01 HENCH1

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 10/21/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
Digital Insurance LLC- Rutland, VT
98 Merchants Row
Rutland, VT 05701

CONTACT NAME:
PHONE (A/C, No, Ext): (802) 775-2311 FAX (A/C, No): (802) 775-8246
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A : Travelers Prop Cas Ins Co	36137
INSURER B :	
INSURER C :	
INSURER D :	
INSURER E :	
INSURER F :	

INSURED
State of New Hampshire DOT
7 Hazen Drive
Concord, NH 03302

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	COMMERCIAL GENERAL LIABILITY						EACH OCCURRENCE	$ 2,000,000
	CLAIMS-MADE [X] OCCUR			PRS-8J961742-IND	10/21/2024	10/21/2025	DAMAGE TO RENTED PREMISES (Ea occurrence)	$
	X Owner's & Contractor						MED EXP (Any one person)	$
							PERSONAL & ADV INJURY	$
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE	$ 3,000,000
	POLICY [ ] PRO-JECT [ ] LOC						PRODUCTS - COMP/OP AGG	$
	OTHER:							$
	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident)	$
	ANY AUTO						BODILY INJURY (Per person)	$
	OWNED AUTOS ONLY / SCHEDULED AUTOS						BODILY INJURY (Per accident)	$
	HIRED AUTOS ONLY / NON-OWNED AUTOS ONLY						PROPERTY DAMAGE (Per accident)	$
								$
	UMBRELLA LIAB / OCCUR						EACH OCCURRENCE	$
	EXCESS LIAB / CLAIMS-MADE						AGGREGATE	$
	DED / RETENTION $							$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY						PER STATUTE / OTH-ER	
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? Y/N (Mandatory in NH)	N/A					E.L. EACH ACCIDENT	$
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE	$
							E.L. DISEASE - POLICY LIMIT	$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
RE: Ashland-Bridgewater X-A003-(003) 24904

CERTIFICATE HOLDER

State of New Hampshire DOT
7 Hazen Drive
Concord, NH 03302

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2015 ACORD CORPORATION. All rights reserved.
The ACORD name and logo are registered marks of ACORD